

BS EN 593 Universal Wafer Butterfly Valve

Model: D71XK



Design Standard: BS EN 593

Connecting Standard: BS EN 1092 PN10/PN16

Face to Face dimension: ISO 5752 Series 20

Top Flange Standard: ISO 5211

Working Pressure: PN16,

PN10 available upon request

Temperature Range: 0°C -100°C

Coating: Fusion Bonded Epoxy Coating in according with ANSI/AWWA C550


Features:

- * Excellent Sealing Performance
- * Low Pressure Loss
- * High Synchronization for Opening and Closing
- * Long Neck Design can be available for Special Usage
- * Highest Cost Performance Ratio

Preferential Price:

Size	Dimension	FOB QINGDAO \$/SET
2"	50	
2 1/2"	65	
3"	80	
4"	100	
5"	125	
6"	150	
8"	200	
10"	250	
12"	300	

Material Specification

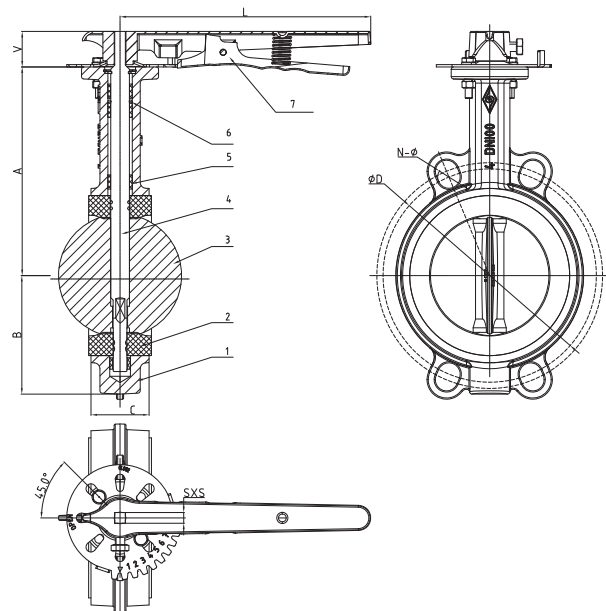

Part No.	Part	Standard Specification	Options
1	Body	EN-GJS-450-10	
2	Seat	EPDM	NBR, PTFE
3	Disc	EN-GJS-450-10	SS304, SS316, ASTM B148 C95400
4	Stem	SS420	SS304, SS316, SS431
5	O-Ring	NBR	EPDM
6	Bushing	PTFE	Nylon
7	Lever	Carbon Steel	

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

Dimensions

DN		Dimensions(mm)								
Inch	mm	A	B	C	D	V	N-Ø	SXS	L	ISO5211
2"	50	140.5	64.5	42	125	30	4- φ 19	9X9	240	F05
2.5"	65	153	72	44	145	30	8- φ 19	9X9	240	F05
3"	80	172	86	44	160	30	8- φ 19	9X9	240	F05
4"	100	176	100	49	180	30	8- φ 19	9X9	240	F05
5"	125	191	112	52	210	30	8- φ 19	14X14	280	F07
6"	150	202.5	128	53	24	30	8- φ 23	14X14	280	F07
8"	200	243.5	164	58	295	39	12- φ 23	17X17	410	F10
10"	250	273	194	66	355	39	12- φ 28	22X22	410	F10
12"	300	311	223	76	410	39	12- φ 28	22X22	410	F10

Flow Rates

