


C302

3 Piece Threaded Stainless Steel Ball Valve
Full Bore - Lockable - ISO Mounting Flange 5211

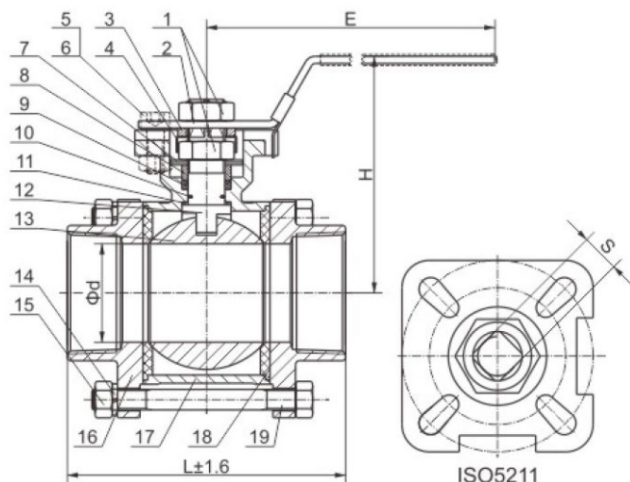

TECHNICAL SPECIFICATIONS

NOMINAL PRESSURE		1000PSI	
Test Pressure	Shell	10.4	MPa
	High Pressure Closure	7.6	
	Low Pressure Closure	0.4 ~ 0.7	
Applicable Temperature		-29 ~ 120 °C	
Applicable medium: water, oil, gas			

PARTS LIST AND MATERIALS

NO.	PART NAME	MATERIAL
1	Nut	304
2	Handle	201SS+PVC
3	Washer	304
4	Anti Loosing Bonnet	304
5	Hex Screws	304
6	Nut	304
7	Disc Spring	304
8	Gland	304
9	Packing	PTFE
10	O-Ring	FKM
11	Thrust Gasket	PTFE
12	Stem	304
13	Ball	304
14	Spring Washer	304
15	Nut	304
16	Bonnet	CF8
17	Body	CF8
18	Seat	PTFE
19	Bolt	304

DIMENSION

Unit: mm

SIZE	d	L	H	E	ISO5211		S
1/4"	11	64	70	125	F03	F04	9
3/8"	12	64	70	125	F03	F04	9
1/2"	15	65	70	125	F03	F04	9
3/4"	20	76	70	125	F03	F04	9
1"	25	83	85	155	F04	F05	11
1 1/4"	32	101	90	155	F04	F05	11
1 1/2"	38	110	110	185	F05	F07	14
2"	49	127	125	185	F05	F07	14
2 1/2"	65	165	140	260	F07	F10	17
3"	80	195	155	260	F07	F10	17
4"	100	251	185	300	F07	F10	19